

Chain hoist test set for friction clutches

Up to 3,500 kg [7,720 lb]

Model FRKPS

WIKA data sheet FO 51.69



Applications

- Checking the overload protection of chain hoists for service companies, chain hoist users, maintenance and corrective maintenance

Special features

- Measuring range 40 ... 3,500 kg [88 ... 7,720 lb]
- No more cumbersome handling with test weights
- One-sensor concept for the entire load range
- Maximum/Minimum value memory
- For testing in accordance with the Machinery Directive 2006/42/EG



Chain hoist test set, model FRKPS

Standard
articles



Description

The FRKPS is used to check the overload protection of chain hoists. The set consists of the force transducer with chain adapters and the hand-held indicator. For the testing, the force transducer is hung on the chain, moves upwards with the chain against the bottom of the chain hoist and thereby blocks the chain.

The force transducer is designed as a shear beam load cell and is therefore insensitive to parasitic forces and torques. The output signal is fed to the hand-held indicator via cable. Two chain adapters and three chain centring sleeves accompany the instrument to allow testing all chain hoists occurring in the specified load range.

The battery-operated model FE630 hand-held indicator evaluates the signals supplied by the force transducer with a very high sampling rate of 7,200 Hz. The hand-held indicator makes it easier to read the values directly.

In the transport case:

- Instrument consisting of:
 - Force transducer with 10 m cable and M9 connector
 - 3 chain centring sleeves
 - 2 chain adapters
- Calibration certificate
- Supplied accessory (model FE630)
- Operating instructions

Specifications

Basic information / Version per standard

Standard	VDI/VDE/DKD 2638
Material (in contact with the environment)	Stainless steel
Ingress protection	IP67
Weight	
Instrument	Approx. 2.5 kg [5.51 lb]
Instrument + transport case + hand-held indicator	Approx. 10 kg [22 lb]

Accuracy specifications / Repeatability

Relative linearity error d_{lin}	$\leq 0.5 \% F_{nom}$
--	-----------------------

Measuring range / Scale range / Setting range / Operating range

Rated load F_{nom}	40 ... 3,500 kg [88 ... 7,720 lb]
Force limit F_L	120 % F_{nom}
Breaking force F_B	> 150 % F_{nom}
Digital indicator or digital display	→ See data sheet FO 58.12 for model FE630

Input signal / Output signal

Rated characteristic value C_{nom}	2.0±0.2 mV/V
--	--------------

Electrical connection

Connection type	Circular connector M9, 5-pin
------------------------	------------------------------

Operating conditions

Rated temperature range	0 ... +80 °C
Operating temperature range	-20 ... +80 °C
Humidity	35 ... 85 % relative humidity
Condensation	Non-condensing

Approvals

Logo	Description	Region
	EU declaration of conformity	European Union
	RoHS directive	

Optional approvals


Logo	Description	Region
	EAC	Eurasian Economic Community

Certificates

Description	
Certificates	■ 2.2 test report per EN 10204 (e.g. state-of-the-art manufacturing, material proof, indication accuracy) ■ 3.1 inspection certificate per EN 10204 (e.g. material proof for wetted metal parts, indication accuracy, calibration certificate)
Calibration ¹⁾	Factory calibration certificate
Recommended calibration interval	1 year (dependent on conditions of use)

1) Calibration is carried out, as standard, at 6 temperatures evenly distributed over the temperature range. On request, special points are also possible.

Dimensions in mm [in]

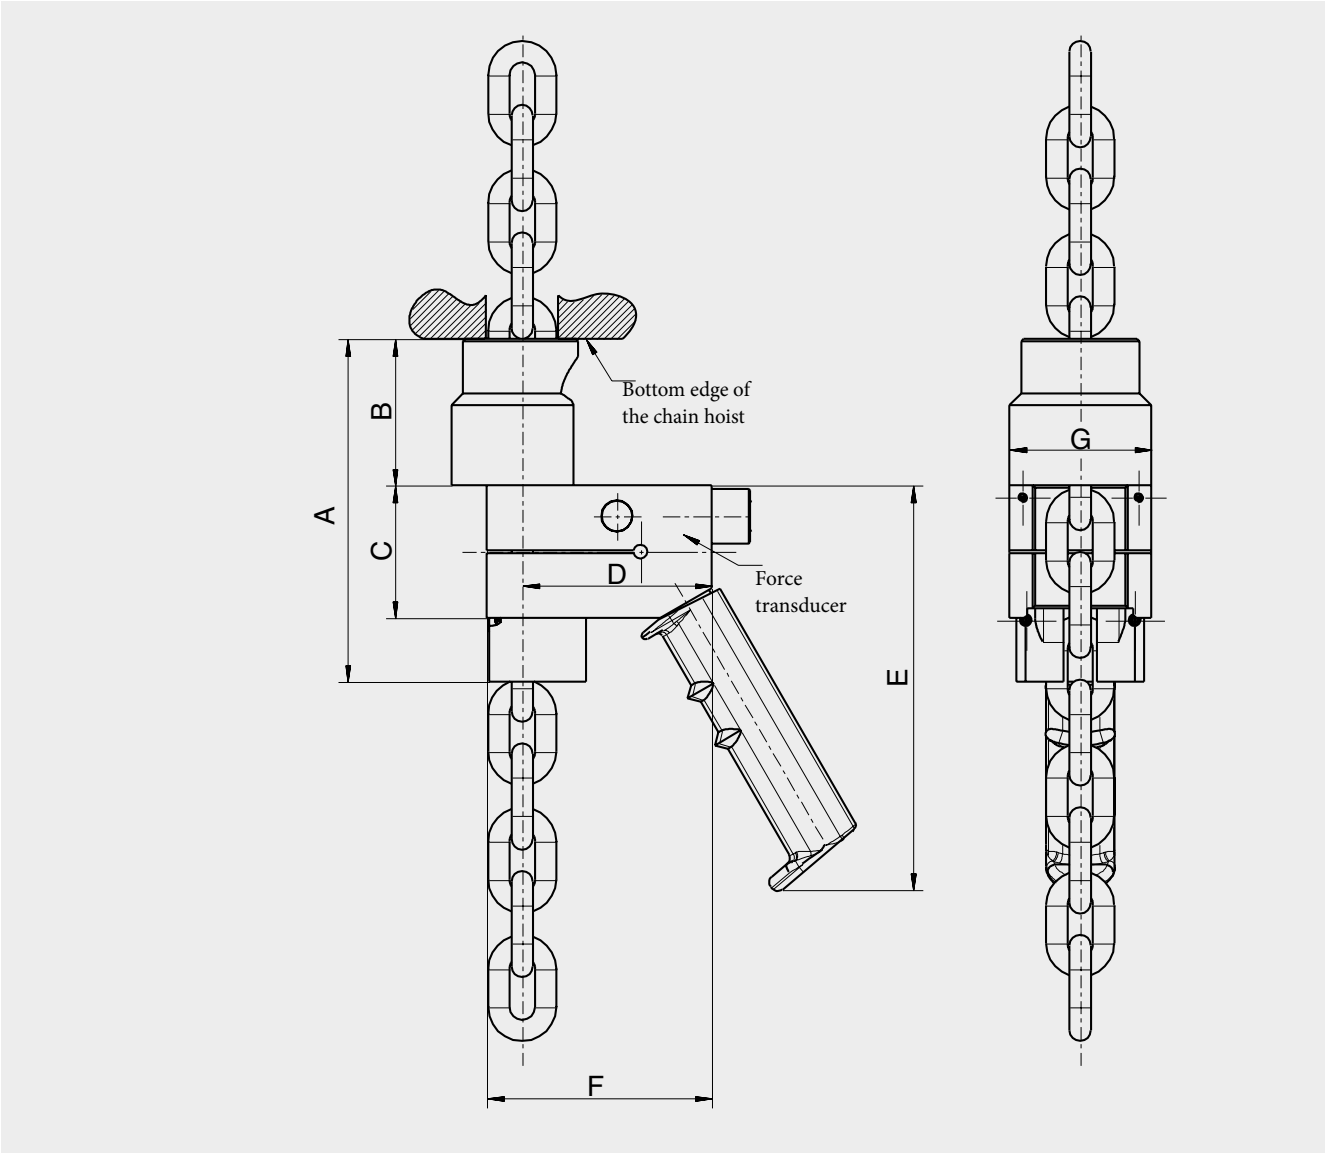

Unit	A	B	C	D	E	F	G
mm	145	62	56	80	171	95	60
inch	5.71	2.44	2.2	3.15	6.73	3.74	2.36

Accessories and spare parts

Model	Description	Order number
FE630	Hand-held indicator for displaying and reading the measured values	14785125
AZK08	Adapter set for profile steel chains incl. chain centring sleeves and chain adapters	14426883

Ordering information

Item number 14796144

© 10/2025 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.



WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. +49 9372 132-0
info@wika.de
www.wika.de